



Instructions for Installing your **HotSeat** Subwoofer

Thank you for your purchase of the **HotSeat Chassis**. The following instructions will aid in the successful installation of the Subwoofer, which has been packaged separately for stability during shipping.

- Once you have unpacked the **HotSeat Chassis**, locate the Subwoofer...



- Carefully unpack the Subwoofer



- Peel the protective backing off the Double-Sided Tape already positioned on the **HotSeat Chassis**



**Crafted with Pride in the U.S.A.**

111 NAPCO DRIVE, TERRYVILLE, CT 06786 TOLL FREE 1-877-GAME TRX (1-877-426-3879)

[www.HOTSEATING.com](http://www.HOTSEATING.com)

Instructions for Installing your **HotSeat** Subwoofer (cont.)

- Clip the Subwoofer on to the Chassis itself and firmly press in to place.



- Locate the Beige colored cable for the center speaker and insert it in to its appropriate location, which is marked by a Light Green Square



- Insert the remaining wires in the appropriate color-coated locations



***Crafted with Pride in the U.S.A.***

111 NAPCO DRIVE, TERRYVILLE, CT 06786 TOLL FREE 1-877-GAME TRX (1-877-426-3879)

[www.HOTSEATING.com](http://www.HOTSEATING.com)

Instructions for Installing your HotSeat Subwoofer (cont.)

- If you are using a PC (computer) with your **HotSeat Chassis**, locate the 5.1 Surround Sound Cable and carefully insert it in to the appropriate location, taking special care not to bend the pins. Finish by plugging the other end of the cable in to the PC as instructed in the “*PC Instructions*”.



- If you are using a Gaming Console (PS2, PS3, and XBOX) with your **HotSeat Chassis**, locate the Red and White Audio cables and plug them in to the appropriate locations, then in to the console itself.



- Complete the set up by plugging in the subwoofer to an electrical outlet.


***Crafted with Pride in the U.S.A.***

111 NAPCO DRIVE, TERRYVILLE, CT 06786 TOLL FREE 1-877-GAME TRX (1-877-426-3879)

[www.HOTSEATINC.com](http://www.HOTSEATINC.com)

Instructions for Installing your HotSeat Subwoofer (cont.)

- If you are using your **HotSeat Simulator** with a PC (computer):
  - Aim the Remote Control that came with your **HotSeat Chassis** at the Center Speaker, located in the front,
  - Press the Orange "Power" Button, then the "Input" button until input # 1 and the "5.1 CH" is illuminated.
  - Press the "+" and "-" Buttons to control the volume

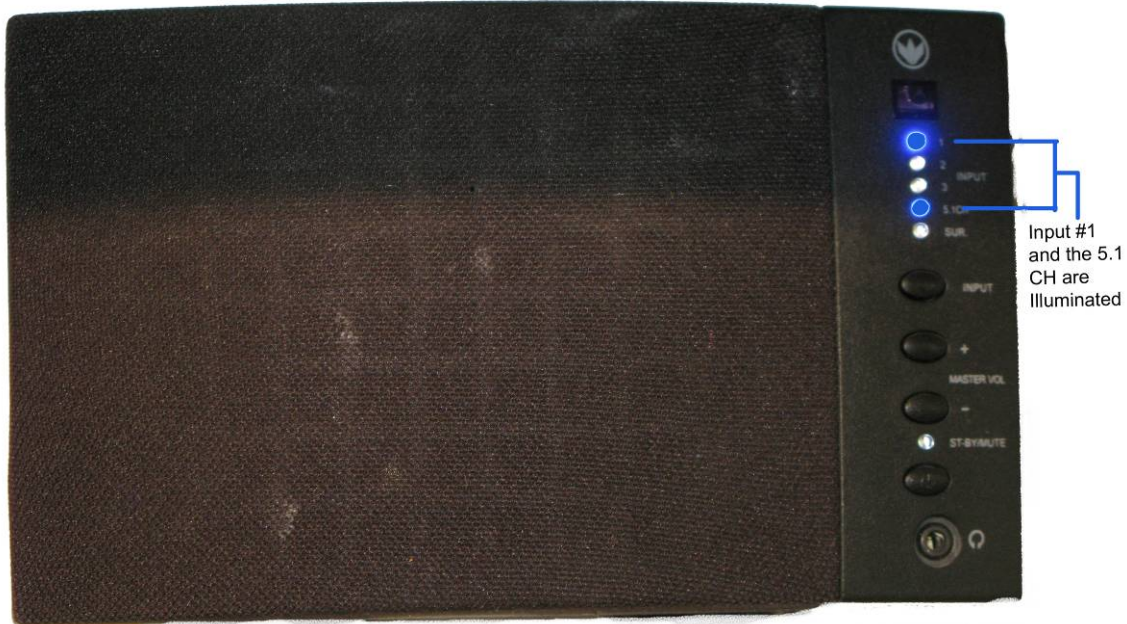

**Crafted with Pride in the U.S.A.**

111 NAPCO DRIVE, TERRYVILLE, CT 06786 TOLL FREE 1-877-GAME TRX (1-877-426-3879)

[www.HOTSEATINC.com](http://www.HOTSEATINC.com)

Instructions for Installing your HotSeat Subwoofer (cont.)

- If you are using your **HotSeat Simulator** with a PlayStation or XBOX:
  - Aim the Remote Control that came with your **HotSeat Chassis** at the Center Speaker, located in the front,
  - Press the Orange "Power" Button, then the "Input" button until input # 2 is illuminated.
  - Press the "Surround" button located on the remote to illuminate the "SUR" light on the Center Speaker.
  - Press the "+" and "-" Buttons to control the volume



For additional help with your installation, please call 860-582-5031 x 0, during normal business hours.

**Enjoy your HotSeat Chassis!!!**

*Crafted with Pride in the U.S.A.*

111 NAPCO DRIVE, TERRYVILLE, CT 06786 TOLL FREE 1-877-GAME TRX (1-877-426-3879)

[www.HOTSEATINC.com](http://www.HOTSEATINC.com)